



Faucet shown here with Fire Magic® sink (not included but available separately)



OUTDOOR FAUCET

INSTALLATION INSTRUCTIONS & OWNER'S MANUAL

INSTALLER: Leave these instructions with consumer.
CONSUMER: Retain for future reference.


IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION OR USE

PARTS LIST

Table 1 - Model Specifications Table

Specification	Value
Nominal fixture cut-out diameter	1-3/4"
Faucet pipe thread	1/2" NPS
Min. vert. clearance above counter*	12"
Maximum distance to supply valve	8"

Contact your local Fire Magic® dealer for replacement parts.

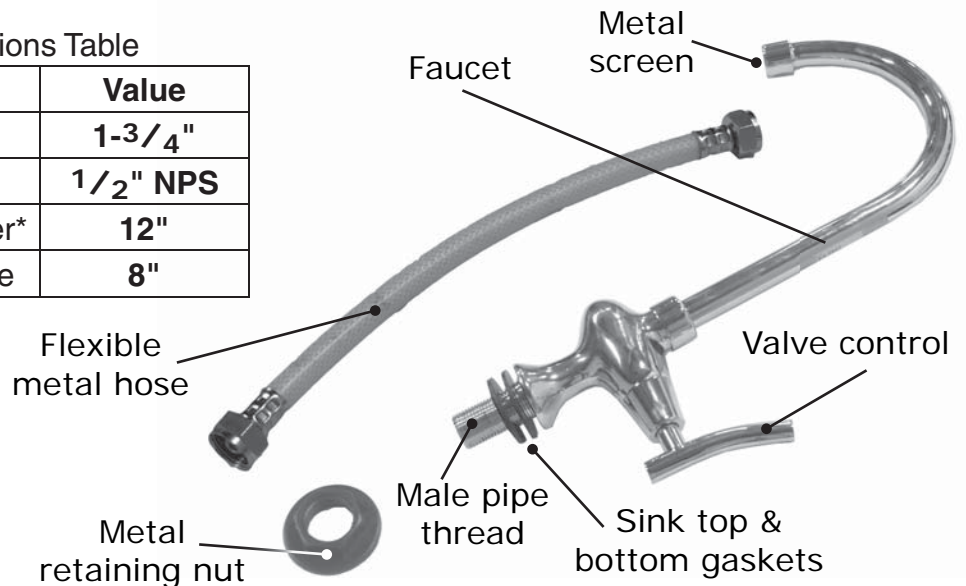

WARRANTY

Fire Magic® grill accessories are warranted for one (1) year from date of purchase.

PLEASE KEEP A COPY OF YOUR SALES SLIP FOR PROOF OF PURCHASE

This warranty applies to the original purchaser and to single family residential use only. It commences from date of purchase, and is valid only with proof of purchase.

This warranty does not cover parts becoming defective through misuse, accidental damage, electrical damage, improper handling, storage, and/or installation. Product must be installed (and gas must be connected) as specified in the instructions or operator's manual, by a **qualified professional installer**. Accessories, parts, valves, remotes, etc., when used must be Peterson Co. product.

This warranty **does not** apply to rust, corrosion, oxidation, or discoloration, unless the affected component becomes inoperable. It **does not** cover labor or labor-related charges.

This warranty specifically excludes liability for **indirect, incidental, or consequential** damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specified legal rights, and you may have other rights that may vary from state to state.

For additional information regarding this warranty, or to place a warranty claim, contact the R.H. Peterson dealer where the product was purchased.

TO REGISTER YOUR PRODUCT ONLINE GO TO: WWW.RHPETERSON.COM, AND CLICK ON PRODUCT REGISTRATION. THANK YOU FOR YOUR PURCHASE.

ROBERT H. PETERSON CO. • 14724 East Proctor Avenue • City of Industry, CA 91746

PREPARING FOR INSTALLATION

This product is intended to be used as an outdoor water faucet and must be installed by a licensed professional plumber according to all applicable local codes.

Make sure the sink top opening and vertical clearances in the target installation meet the specifications in Table 1.

INSTALLING THE FAUCET

Remove the metal retaining nut and bottom gasket from the male pipe thread. Apply silicon sealant to the sink top around the opening. Insert the faucet (with sink top gasket) into the sink opening male pipe thread first and orient it as desired. Then re-attach the bottom gasket and metal retaining nut and tighten with a 1" box wrench until the fixture can no longer be moved from its intended position. Do not over tighten.

Next connect one end of the 1 foot length of flexible braided-steel hose to the male pipe fitting at the bottom of the faucet. Then connect the other end to the water source. Use Teflon tape or other sealant as required.

OPERATION

Turn the valve knob clockwise to turn on the water and counterclockwise to turn the water off. The screen at the mouth of the faucet may be removed by carefully using a standard screwdriver to pry it out for cleaning. It may then be snapped back into place.

CARE AND CLEANING

This faucet has a stainless steel finish. Use a standard non-abrasive kitchen cleaner for basic cleaning or a quality stainless-steel cleaner if heavy cleaning is required.

Tighten retaining nut

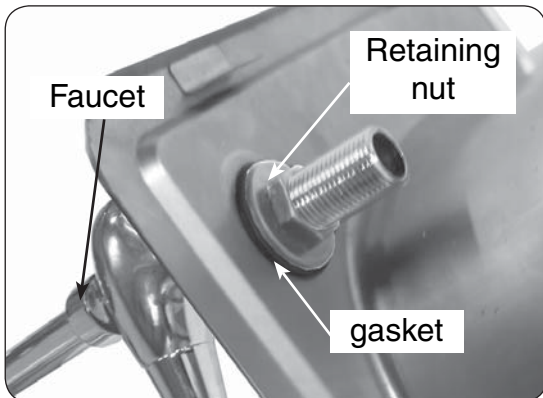


Fig. 2-1